

CX-3008M

WEDGE MONITOR

Order ref: 170.220

User Manual



Dual angle wedge speaker unit made from premium Russian ply with custom drive units giving a full range output accurate delivery of programme material.


Multiple flying points and pole mount options add to the versatility of the cabinet, enabling use as a front-of-house speaker as well as stage monitor.

- Durable textured black paint finish
- 12 x M10 flying points
- Powder-coated steel grille lined with dust filter
- Speakon® connectors fitted
- 35mm pole mount socket
- All fittings rebated for easier stacking and arraying
- Steel bar handles fitted as standard

Specifications

Power RMS	300W
Power Max	600W (5 minutes max)
LF driver	380mmØ (15")
HF driver	Compression driver with 44mmØ titanium diaphragm
Impedance	8Ω
Frequency response (-3dB)	50Hz – 18KHz
Frequency response (-10dB)	45Hz – 20KHz
Sensitivity (1W/1m)	97dB
Dispersion (H x V)	90° x 60°
Connectors	2 x Speakon® (NL 4)
Dimensions	490 x 670 x 390mm
Weight	30kg

Technical drawings

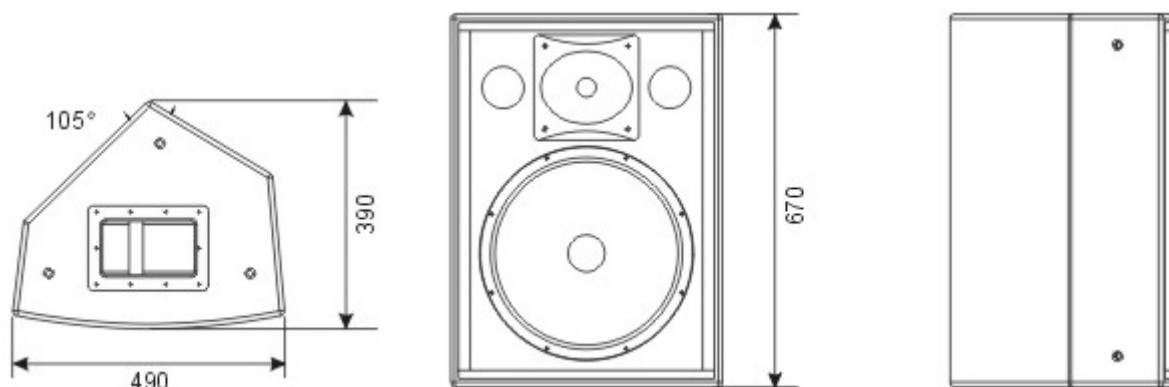


Technical Diagrams


Frequency response - Magnitude




Impedance - Magnitude

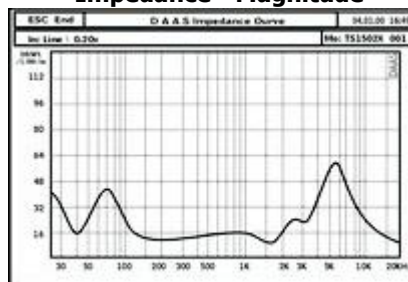

Distortion - Magnitude

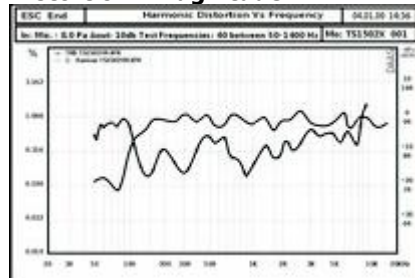

Waterfall - Magnitude

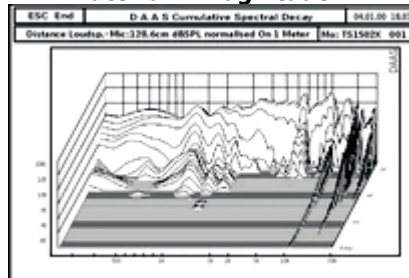

Connection

