

## **CX-5008B**

### SUBWOOFER CABINET

Order ref: 170.359

User Manual



High energy sub cabinet made from premium Russian ply with medium throw horn-loading.

Computer designed bracing and porting of the enclosure help to optimize and focus low frequencies.


Capable of developing high SPL output, this sub unit is a key component for any large sound reinforcement system.

- High power subwoofer
- Durable textured black paint finish
- Heavy duty powder-coated steel grille
- Speakon® connectors fitted
- Top mounted 35mm pole mount socket
- All fittings rebated for easier stacking and arraying
- Medium throw horn loading

## Specifications


Power RMS	450W
Power Max	900W (5 minutes max)
LF drivers	380mmØ (15")
Impedance	8Ω
Frequency response (-3dB)	35Hz – 500Hz
Sensitivity (1W/1m)	99dB
Connectors	2 x Speakon® (NL 4)
Dimensions	520 x 740 x 650mm
Weight	43.5kg

## Technical drawings

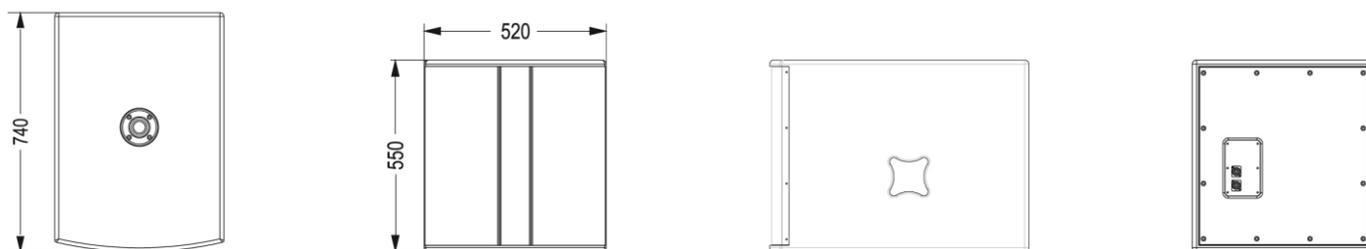


## Technical Diagrams


### Frequency response - Magnitude

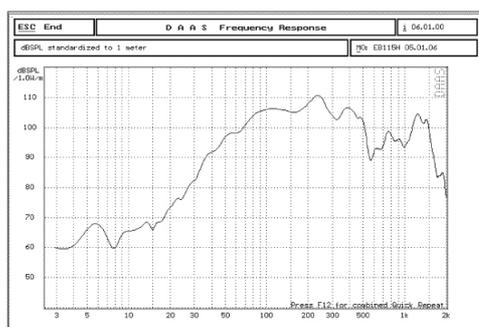


### Impedance - Magnitude

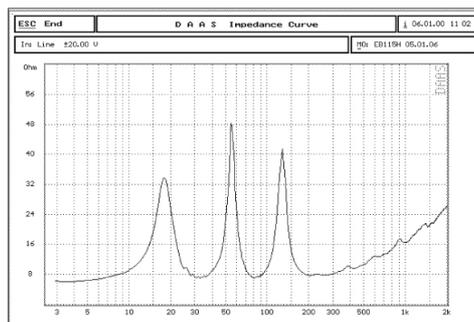


### Distortion - Magnitude

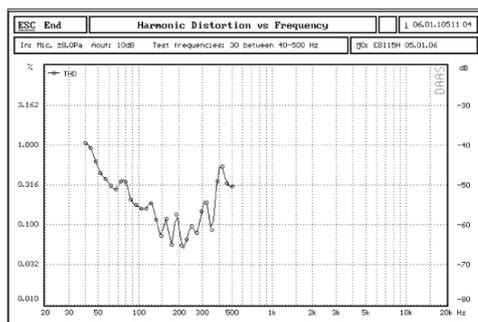

### Waterfall - Magnitude

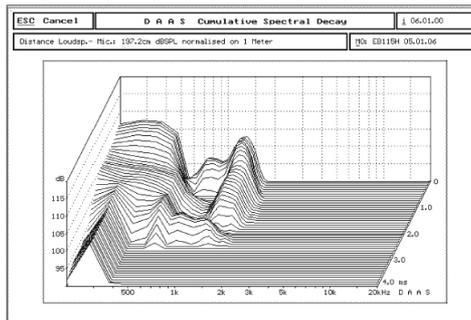

### Connection



Errors and omissions excepted.  
Copyright© 2012. AVSL Group Ltd.