



BEAMZ
MADE
EAZY

150.455 V1.0

SP420IP

QUICK START GUIDE

CONTROL MENU

MENU		DESCRIPTION
DMX ADDR	A001-Axxx	Select dmx start address
CHANNEL MODE	1-CH	Choose between 1, 3, 5 or 9 channel mode
AUTO	CC00-CC99	Jump mode from slow to fast
	CP00-CP99	Fade mode from slow to fast
	DE00-DE99	Pulse mode from slow to fast
MANUAL	o000- o255	Dimmer Amber All Leds
	y000 - y255	Dimmer Warm white All leds
DISPLAY	ON / OFF	Display On/ Off

DMX CHANNELS

1 CHANNEL

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Tungsten mode	000-255	Full tungsten mode on 4 Leds

3 CHANNELS


CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Master dimmer
2	Dimmer	000-255	Amber
3	Dimmer	000-255	Warm White

5 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Master dimmer
2	Tungsten mode	000-255	Tungsten mode Led 1
3		000-255	Tungsten mode Led 2
4		000-255	Tungsten mode Led 3
5		000-255	Tungsten mode Led 4

9 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Master dimmer
2	Dimmer Led 1	000-255	Amber
3	Dimmer Led 1	000-255	Warm White
4	Dimmer Led 2	000-255	Amber
5	Dimmer Led 2	000-255	Warm White
6	Dimmer Led 3	000-255	Amber
7	Dimmer Led 3	000-255	Warm White
8	Dimmer Led 4	000-255	Amber
9	Dimmer Led 4	000-255	Warm White

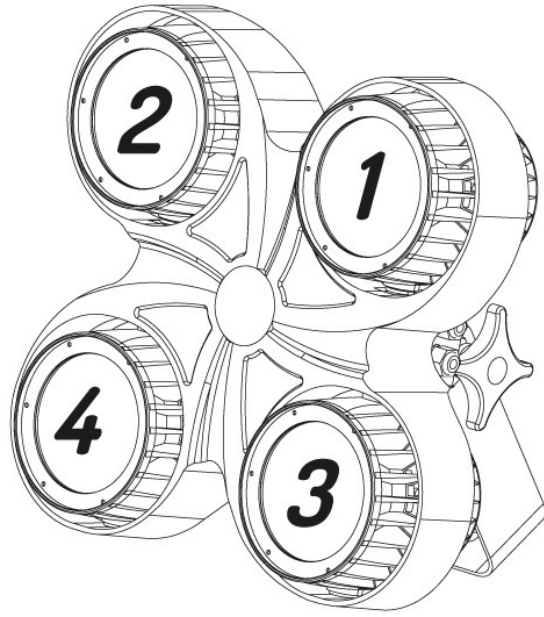



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!

