



BEAMZ
MADE
EAZY

151.341 V1

BT430 PAR

QUICK START GUIDE

REMOTE CONTROLLER

1. SWITCHING THE LEDS ON AND OFF

The LEDs can be switched on with the button ON and switched off with the button OFF.

2. ADJUST BRIGHTNESS AND SPEED

Use the buttons and to adjust the brightness for the static colours or speed in program mode.

3. SELECT WARM WHITE OR COOL WHITE

R: Warm White

G: Cool White

B: Warm White + Cool White

W: Warm White + Cool White

4. COLOUR BUTTONS

Press one of the twelve colour buttons to select a built-in programme.


5. SELECTING AN INTERNAL PROGRAM

FLASH: Colour switch

STROBE: Colour strobe

FADE: Colour fade

SMOOTH: Colour switch and strobe

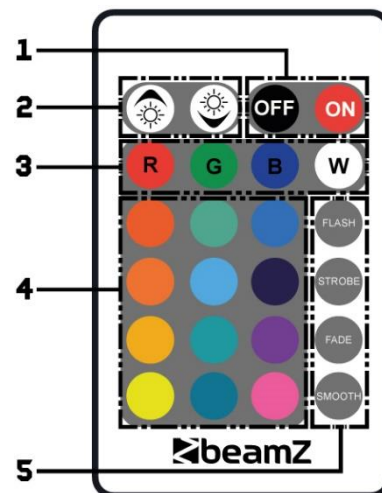

CONTROL MENU

MENU				DESCRIPTION	
MODE	ADDR	VALU	A001-Axxx	DMX address setting	
		SLAV		Stand alone mode	
	AUTO	IPI-8	ALON (AU-A)	SP_1-5	Pre program (alone) with speed adjustment
			MAST (AU-M)		Auto run (master) with speed adjustment
	SOUN	IPI-8	ALON (SO-A)		Sound control (alone)
MAST (SO-M)				Sound setting (master)	
SET	MIC	M-xx		Microphone sensitivity	
	LODA	On/Off		Reload data	
	VER	V-x.x		Software version	
	CALI	Code			Input password (Beamz authorization only)
			CH03-CH04		LED Temperature calibration
DMX	MOD1			DMX 16 channel mode	
	MOD2			DMX 7 channel mode	
REST	On/Off			Reset to factory default	
NANU	Cxxx	000-255		Manual control cool white LED	
	Uxxx	000-255		Manual control warm white LED	
TEMP	Txxx			Current temperature	

DMX CHANNELS

7 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	Master dimmer 0-100%
2	Strobe	000-031	No function
		032-063	Full on
		064-095	Strobe effect slow to fast
		096-127	Full on
		128-159	Pulse-effect in sequences slow to fast
		160-191	Full on
		192-223	Random strobe effect slow to fast
		224-255	Full on
3	Warm White	000-255	Warm white dimmer 0-100%
4	Cold White	000-255	Cold white dimmer 0-100%
5	Colour Temperature	000-015	No function
		016-045	Below 3200K
		046-075	3200K - 3500K
		076-105	3500K - 5000K
		106-135	5000K - 5500K
		136-165	5500K - 6000K
		166-195	6000K - 6500K
		196-225	6500K - 7000K
6	Macro Run	226-255	7000K - 8000K
		000-015	No function
		016-027	Macro run 1
		028-039	Macro run 2
		040-051	Macro run 3
		052-063	Macro run 4
		064-075	Macro run 5
		076-087	Macro run 6
		088-099	Macro run 7
		100-111	Macro run 8
		112-123	Macro run 9
		124-135	Macro run 10
		136-147	Macro run 11
		148-159	Macro run 12
		160-171	Macro run 13
172-183	Macro run 14		
184-195	Macro run 15		
7	Macro Run speed	196-207	Macro sound 1
		208-219	Macro sound 2
		220-231	Macro sound 3
		232-243	Macro sound 4
		244-255	Macro sound 5
7	Macro Run speed	000-255	Macro speed from slow to fast



BEAMZ

**YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

