



BEAMZ
MADE
EAZY


150.802_150.803_150.822 V1.1

BAC322 & 332

QUICK START GUIDE

CONTROL MENU

If the display is in standby, unlock it:

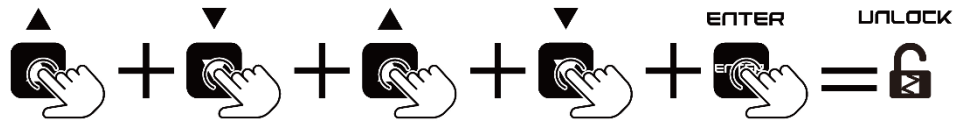

MENU		DESCRIPTION	
ADDRESS	001-512	DMX address setting	
CHANNEL	6 channels	DMX channel mode	
	8 channels		
	10 channels		
	11 channels		
DIM CURVE	Dim curve 1	Select dimmer curve	
	Dim curve 2		
	Dim curve 3		
	Dim curve 4		
DMX STATE	Blackout/Hold	Select DMX status when signal lost.	
STATIC COLOUR	1-32	Static colour	
JUMP MODE	1-9	Speed from slow to fast	
FADE MODE	1-9	Speed from slow to fast	
PULSE MODE	1-9	Speed from slow to fast	
SOUND MODE	Sub Mode	1-4	Sound mode 1-4
	Sensitivity	1-9	Adjust sensitivity
MANUAL MODE	Red	000-255	Dimmer Red
	Green	000-255	Dimmer Green
	Blue	000-255	Dimmer Blue
	Amber	000-255	Dimmer Amber
	Lime	000-255	Dimmer Lime
	Cyan	000-255	Dimmer Cyan
	Strobe	000-009	Speed from slow to fast
SET UP	Key Lock	OFF/ON	Enable/disable button lock function
	Remote	OFF/ON	Enable/disable infrared remote function
	Display	10s/20s/30S/ Always ON	Display standby time
	Reset	YES/NO	Reset system
INFORMATION	Model	BAC series	Product model
	Colour	RGBXXX	LED mix colour
	Software	Vxxx	Software version
	Hardware	QY-XXX	Hardware version
	Work Time	xxxx.xH	Current running time
Total Time	xxxx.xH	Total running time	

DMX CHANNELS

6 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	RED	000-255	Dimmer Red 0-100%
2	GREEN	000-255	Dimmer Green 0-100%
3	BLUE	000-255	Dimmer Blue 0-100%
4	AMBER	000-255	Dimmer Amber 0-100%
5	LIME	000-255	Dimmer Lime 0-100%
6	CYAN	000-255	Dimmer Cyan 0-100%

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	AMBER	000-255	Dimmer Amber 0-100%
6	LIME	000-255	Dimmer Lime 0-100%
7	CYAN	000-255	Dimmer Cyan 0-100%
8	STROBE	000-009	No function
		010-255	Strobe from slow to fast

10 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	AMBER	000-255	Dimmer Amber 0-100%
6	LIME	000-255	Dimmer Lime 0-100%
7	CYAN	000-255	Dimmer Cyan 0-100%
8	STROBE	000-009	No function
		010-255	Strobe from slow to fast
		000-020	No function
		021-050	Static colour (colour is controlled by CH10, please refer to below table)
		051-080	Jump mode (Speed controlled by CH10)
		081-110	Fade mode (Speed controlled by CH10)
		111-140	Pulse mode (Speed controlled by CH10)
		141-170	Sound mode 1 (Sensitivity controlled by CH10)
		171-200	Sound mode 2 (Sensitivity controlled by CH10)
		201-230	Sound mode 3 (Sensitivity controlled by CH10)
9	MODE	231-255	Sound mode 4 (Sensitivity controlled by CH10)
		000-255	Speed from slow to fast (CH9=051-140)
		000-255	Static colour (CH9=021-050, please refer to below table for details)
10	CONTROL MODE	000-255	Sensitivity (CH9=141-255)

11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	AMBER	000-255	Dimmer Amber 0-100%
6	LIME	000-255	Dimmer Lime 0-100%
7	CYAN	000-255	Dimmer Cyan 0-100%
8	STROBE	000-009	No function
		010-255	Strobe from slow to fast
		000-020	No function
		021-050	Static colour (colour is controlled by CH10, please refer to below table)
		051-080	Jump mode (Speed controlled by CH10)
		081-110	Fade mode (Speed controlled by CH10)
		111-140	Pulse mode (Speed controlled by CH10)
		141-170	Sound mode 1 (Sensitivity controlled by CH10)
		171-200	Sound mode 2 (Sensitivity controlled by CH10)
9	MODE	201-230	Sound mode 3 (Sensitivity controlled by CH10)
		231-255	Sound mode 4 (Sensitivity controlled by CH10)
		000-255	Speed from slow to fast (CH9=051-140)
		000-255	Static colour (CH9=021-050, please refer to below table for details)
		000-255	Sensitivity (CH9=141-255)
10	CONTROL MODE	000-063	Dimmer curve 1
11	DIMMING CURVE	064-127	Dimmer curve 2
		128-191	Dimmer curve 3
		192-255	Dimmer curve 4

STATIC COLOR TABLE:

VALUE	DESCRIPTION	VALUE	DESCRIPTION
000-007	Static colour 1	128-135	Static colour 17
008-015	Static colour 2	136-143	Static colour 18
016-023	Static colour 3	144-151	Static colour 19
024-031	Static colour 4	152-159	Static colour 20
032-039	Static colour 5	160-167	Static colour 21
040-047	Static colour 6	168-175	Static colour 22
048-055	Static colour 7	176-183	Static colour 23
056-063	Static colour 8	184-191	Static colour 24
064-071	Static colour 9	192-199	Static colour 25
072-079	Static colour 10	200-207	Static colour 26
080-087	Static colour 11	208-215	Static colour 27
088-095	Static colour 12	216-223	Static colour 28
096-103	Static colour 13	224-231	Static colour 29
104-111	Static colour 14	232-239	Static colour 30
112-119	Static colour 15	240-247	Static colour 31
120-127	Static colour 16	248-255	Static colour 32









BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!

